(28)

BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

VIDYARANYAPURA SUB DIVISION

BYATARAYANAPURA DIVISION

NAME OF WORK:- VIDHARANAYAPURA SUVARNA MAHOTSAVA PLAYGROUND FENCING AND DEVELOPMENT WORKS IN WARD NO 09 OF VIDYARANYAPURA SUB DIVISION.

ESTIMATE COST: 20.00 LAKHS

BRUHAT BANGALORE MAHANAGARA PALIKE

BYATARAYAPURA DIVISION, YELAHANKA ZONE

Name of Work : Vidharanayapura suvarna Mahotsava Playground fencing and Development works in ward No 09 of Vidyaranyapura sub Division.

27

Estimated cost : Rs 20.00 Lakhs

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
1	KSRB 2-2.2 : **Earth work excavation for foundation of buildings,** water supply, sanitary lines and electrical conduits either in pits or in trenches 1.5m and above in width, in hard soil not exceeding 1.5m , in depth including dressing the bottom and sides of pits and trenches, stacking the excavated soil clear from edges of excavation with lead upto 50m. specification, specification. No. KBS 2.1(b) / 2.3.5, (P. No. 5 It No. 2.4)	**cum**							
	For drain	**cum**	1	495.00	0.60	0.30	**89.10**	227.88	**20304.00**
	Basic rate	211.00							
	Add 8% AW	16.88							
		227.88							
2	KSRB-4-1.3 : Providing and laying in position plain cement concrete of mix **M 7.5 withOPC** cement at 180kgs, with 40mm and down size graded granite metal coarse aggregates @0.892cum and fine aggregates @0.57cum machine mixed, concrete laid in layers not, exceeding 15cms, thick, well compacted, in foundation and plinth, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1,4.2,(P. No. 12 It No. 4.3 of PWD SR 2013-14)	**Cum**							
	for Drain bottom		1	495.00	0.60	0.15	44.55		
							44.55	4290.84	**191157.00**
	Basic rate	3973.00							
	Add 8% AW	317.84							
		4290.84							
3	KSRB-4-1.6 : Providing and laying in position plain cement concrete of mix **M 15 withOPC cement** @ 240kgs, with 20mm and down size graded granite metal coarse aggregates @0.878cum and fine aggregates @0.459cum machine mixed, concrete laid in layers not, exceeding 15cms, thick, well compacted, in foundation and plinth, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1,4.2/ P.No. 12/ Item No. 4.6/ PWD SR 2013-14	**Cum**							
	coping		1	495.00	0.50	0.15	37.13		
	for fixing of poles of fencing		70	0.45	0.50	0.40	6.30		

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
							43.43	4779.00	**207528.00**
	Basic rate	4425.00							
	Add 8% AW	354.00							
		4779.00							
4	Providing **chain link fencing 50mm size of 8 guage** properly stretched between rectangular poles and fixed with suitable bolts & nuts, the free ends shall be welded to the pole and block pipe at top and bottom as required including cost of all materials, labour, lead and lifts, cutting, bending wherever necessary, wastage and lapping etc complete as per direction of the Engineer-in-charge of work including **two coats of approved quality paint** over one coat of shop paint.(P 270 It 37.3)	**sqm**							
			1	495.00	1.20		594.00		
			1	50.00	1.20		60.00		
							654.00	656.64	**429443.00**
	Basic rate	**608.00**							
	Add 8% AW	48.64							
	Total	**656.64**							
5	Supplying and fixing **M.S. Rectangular poles** made out of 2 equal angles of **65x65x6 mm** welded together and fixed in CC (1:2:4) WITH 2 NOS 16mm dia M.S. hold fast rods each of length 25 cms. Including cost of all materials cutting, bending scaffolding wherever necessary, nicely finishing the welded joints with all lead and lift and as per the directions of the Engineer-in-charge of the work and including providing **2 coats of approved quality paint** over one coat of shop painting. (excluding cost of earth work and concrete)(P 270 It 37.2)	**mtr**							
			206	1.20			**247.20**	1098.36	**271515.00**
	Basic rate	**1017.00**							
	Add 8% AW	81.36							
	Total	**1098.36**							
6	Providing and fixing **M.S. Block pipe of 38mm dia,** of heavy guage of 14 including removing the bends, cutting the pipe, and fixing pipe in between the two verticle poles (M.S. rectangular poles) and spot welding the chain link with M.S. block pipe including cost of all materials wastage in cutting, and scaffolding wherever necessary with all lead and lift as directed by the Engineer-in-charge of work etc., complete including **two coats of approved quality paint** over one coat of shop paint (P 270 It 37.4)	**mtr**							
			3	495.00			1485.00		
			1	100.00			100.00		
							1585.00	299.16	**474169.00**
	Basic rate	**277.00**							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
	Add 8% AW	22.16							
	Total	**299.16**							
7	KSRB 15-18.3 : **Providing and applying enamel metal paint** one coat (excluding priming coat) on previously painted steel or other metal surface brushing to give an even shade after cleaning oil, grease, dirt and other foreign matter, including cost of materials, labour, complete as per specifications. Page No. 130/ Item No. 15.75/ PWD SR -2013-14	Sqm							
			1	495.00		2.70	1336.50		
							1336.50	48.60	**64954.00**
	Basic rate	**45.00**							
	Add 8% AW	3.60							
	Total	**48.60**							
8	Fabricating, providing and erecting in poiston of **M.S Ornamental security Grill Gate** with out hot dip using75x12mm M.S flat for alround frame work with verticals at the centre and horizontal centere support M.S square of 20x20mm of different heights as shown in the draing are to be fixed at 16 cms c/c for square bars of full height and at 8cmsc/c for bottom rods providg ornamental CI designers at the botom and c I arrows in the middle and top. The entire frame work is to be fixed by means of expansion bolts to the brick pillars with necesary drilling holes. The work includes providing two coats of enamel painting over one coatr of red lead ready mix primer coat etc complet cost of all labour, painting, erection charges using hoist pulleycranes with all lead and lift, loading, transporting and unloading using hoist pulley cranes, scaffolding charges and all other incidental charges required for successful completion of the work as per specification and drawing, Page No. 46/ I No. 7.30/ PWD SR 2013-14	**kgs**							
			1	6.00	1.80		10.80		
				wt	50 kg/sqm		540.00	147.96	**79898.00**
	Basic rate	**137.00**							
	Add 8% AW	10.96							
	Total	**147.96**							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
11	KSRB 2-1.1: Earth work in surface excavation in ordinary soil for **leveling and lowering** the ground manually (other than foundation of buildings, culverts, road drains and trenches of pipe line and cables) and removing the excavated stuff to a distance not exceeding 50m and lift upto 1.5m, excavated surface leveled and neatly dressed, disposed earth to be leveled after breaking of clods and neatly dressed as per specifications, Specification No KBS 2.1(a) / 2.3.1 (PWD SR 2013-14 ,P. No. 5/ Item No. 2.1/)								
		cum	1	340.00	3.00	0.35	**357.00**	126.36	**45111.00**
	Basic rate	117.00							
	Add 8% AW	9.36							
	Total	**126.36**							
12	**Sub Total**								**1784675.00**
13	KRIDL Service Charges and Applicable Charges @ 11%								**196314.00**
14	QC Charges @ 1%								**17847.00**
15	Miscesalaneous and unforeseen Charges	L/S							**1164.00**
							Total		**2000000.00**
	(Rupees twenty lakhs only)								

CERTIFICATE :

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per P.W.D S.R of 2013-14
3 The provisions were made in this estimate are necessary and adequate.
4 This works come under B.B.M.P. limits.

Assistant Engineer
ward No 09

Assistant Executive Engineer
Vidyaranyapura sub Division
BBMP, Bangalore

Executive Engineer
Byatarayanpura Division
BBMP, Bangalore

ADMINISTRATIVELY SANCTIONED FOR Rs 20,00 lakhs
Rupees Twenty lakhs only
Under P-0190

Registered as EE ( ) No ...9...
Subject to conditions contained in
enclosed memo EE ( ) No ...91...
Dt Estimate Sanctioned
dated 26-2-2014 Rs 20,00 lakhs

Addl Commissioner
(Yelahanka Zone)
BBMP, Bengaluru-92

Technical Sanction for Rs. 20.00 Lakhs
Twenty lakhs only
P-0190.
EE|BTP|347|13-14, 03|03|14.

BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE, BYATARAYANAPURA DIVISION

23

Lead Statement for Srinivaspura Dumping Yard for Ward No. 09, Vidyaranyapura Sub Division.

Lead Distance

1.	From BBMP Sub Division office to Devi Circle	1.50 Kms
2.	From Devi Circle to Thirumala Daba	2.00 Kms
3.	From Thirumala Daba to 3rd Cross SBI Bank	2.00 Kms
4.	From 3rd Cross SBI Bank to Sheshadripuram College	0.50 Kms
5.	From Shesadripuram College to Police Station	0.80 Kms
6.	From Police Station to Kogilu Cross	0.60 Kms
7.	From Kogilu Cross to Srinivasapura	4.00 Kms
8.	From Srinivasapura to Dumping Yard	0.50 Kms
	Total	**11.90 Kms**

Certificate:

1. Certified that the Srinivasapura Dumping Yard us the approved dumping yard for ward no. 09 BBMP
2. BBMP Sub Division office Vidyaranyapura is taken as the centre place for calculating the lead distance for ward no. 09.
3. The above distance is the shortest distance for calculating the lead.

Assistant Engineer Ward No. 09	Assistant Executive Engineer Vidyaranyapura Sub Division	Executive Engineer Byatarayanapura Division

Name of Work: Vidyaranyapura Suvarna Mahotsava playground fencing and Development Works in Ward no. 09 of Vidyaranyapura Sub-Division.

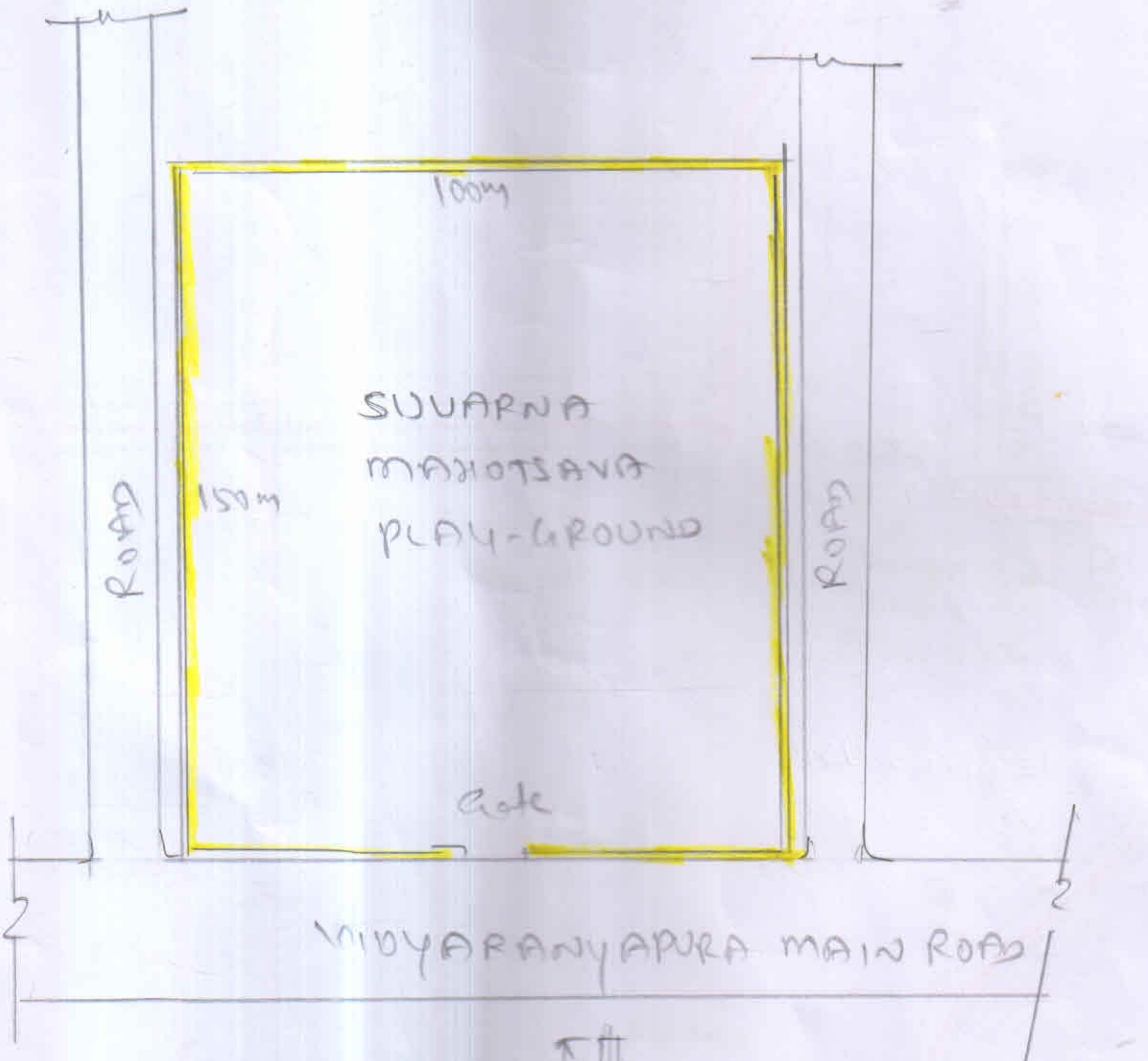

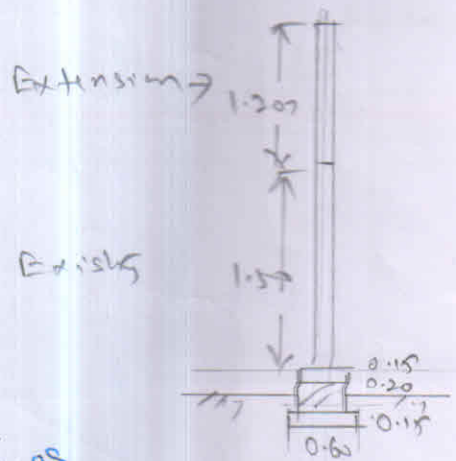

Imp to fencing

AE-09

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರಿಗೆ.
ವಿದ್ಯಾರಣ್ಯಪುರ ಉಪ ವಿಭಾಗ
ಯಲಹಂಕ ವಲಯ,
ಬೃ. ಬೆಂ. ಮ. ಪಾ., ಬೆಂಗಳೂರು-97

LEAD CHART FOR DUMPING-YARD FOR WARD NO 09

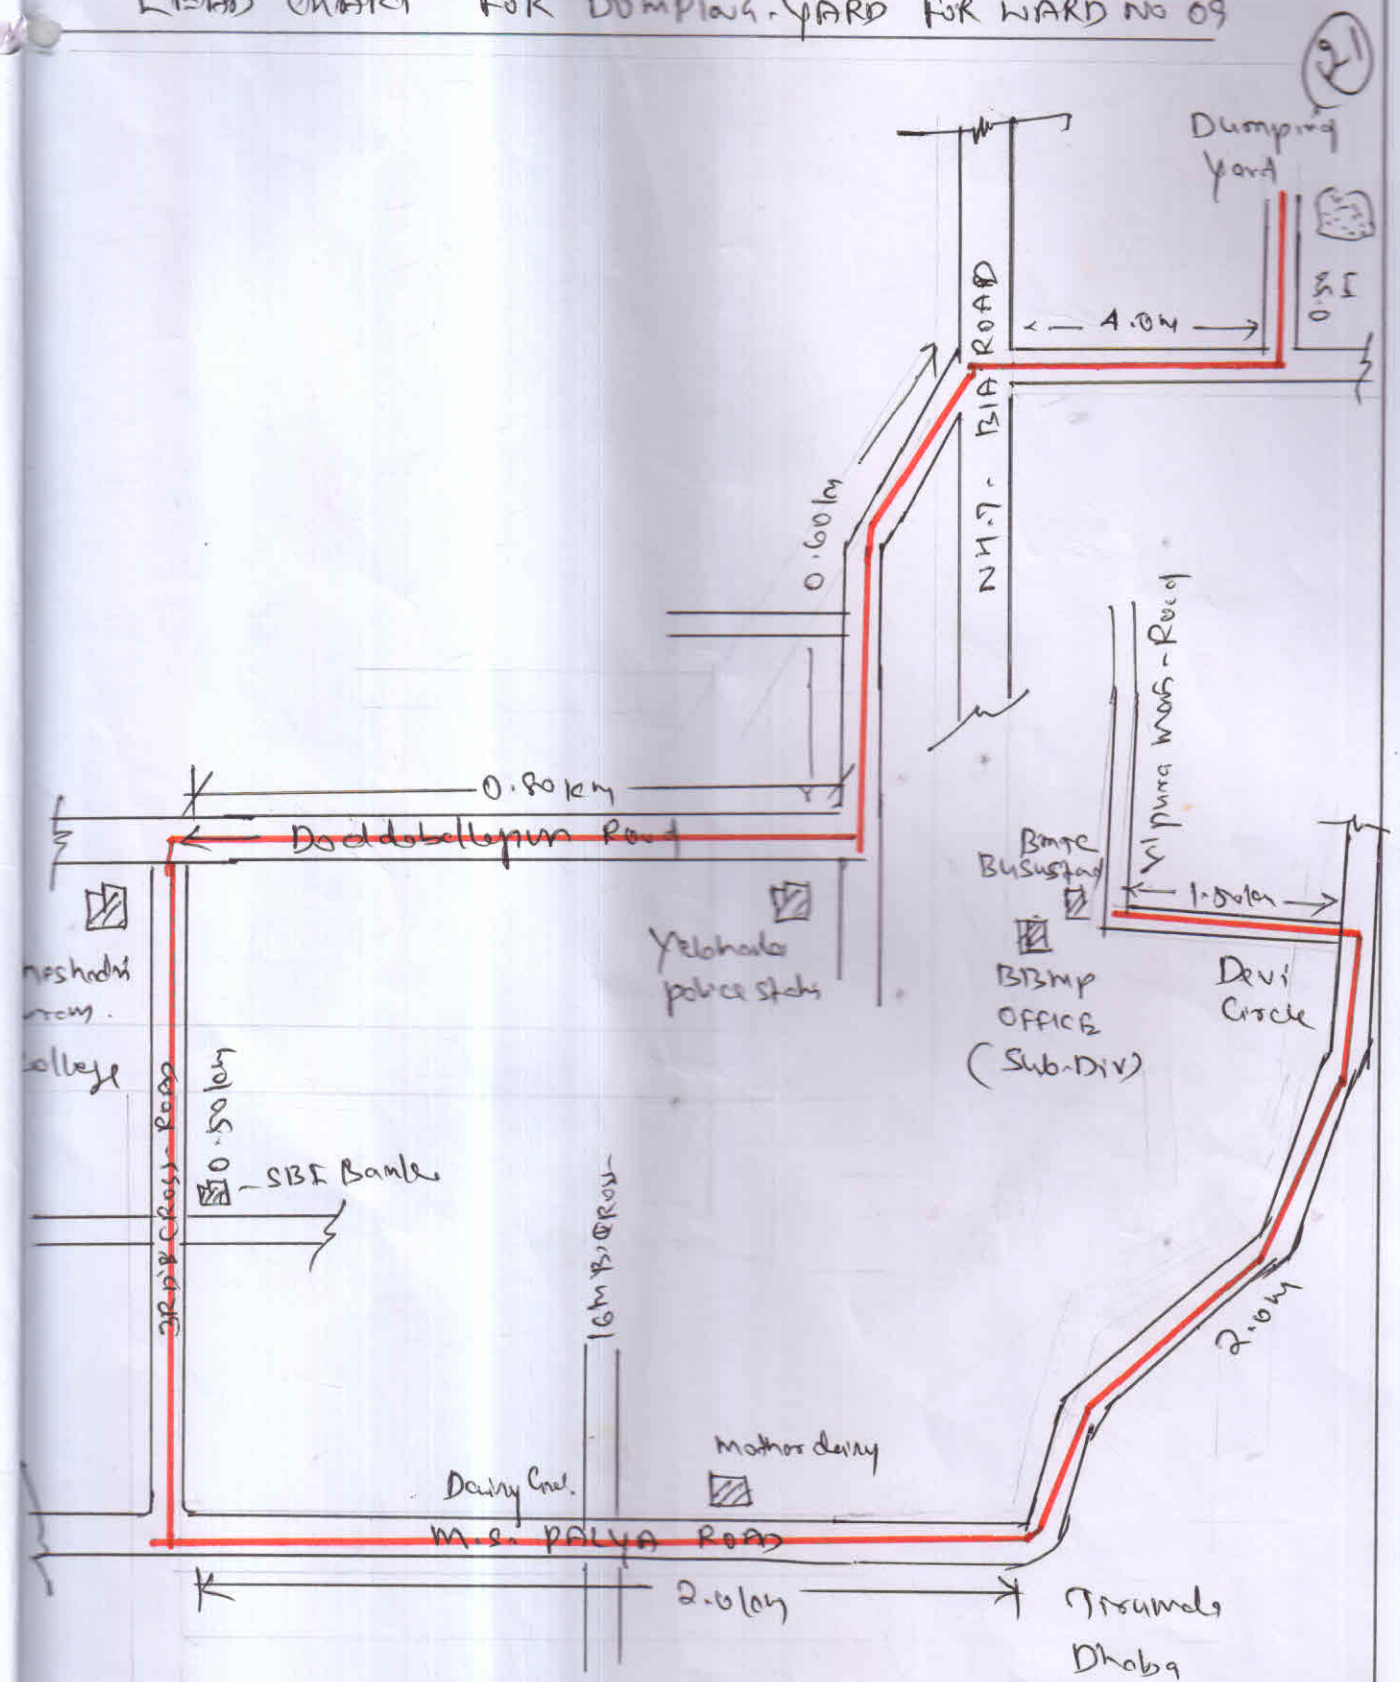

AE. L-3

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ವಿದ್ಯಾರಣ್ಯಪುರ ಉಪ ವಿಭಾಗ,
ಯಲಹಂಕ ವಲಯ,
ಬೃ. ಬೆಂ. ಮ. ಪಾ., ಬೆಂಗಳೂರು-97

152 - BYATARAYANAPURA AC
WARD NAME : 9 - VIDYARANYAPURA

N

20

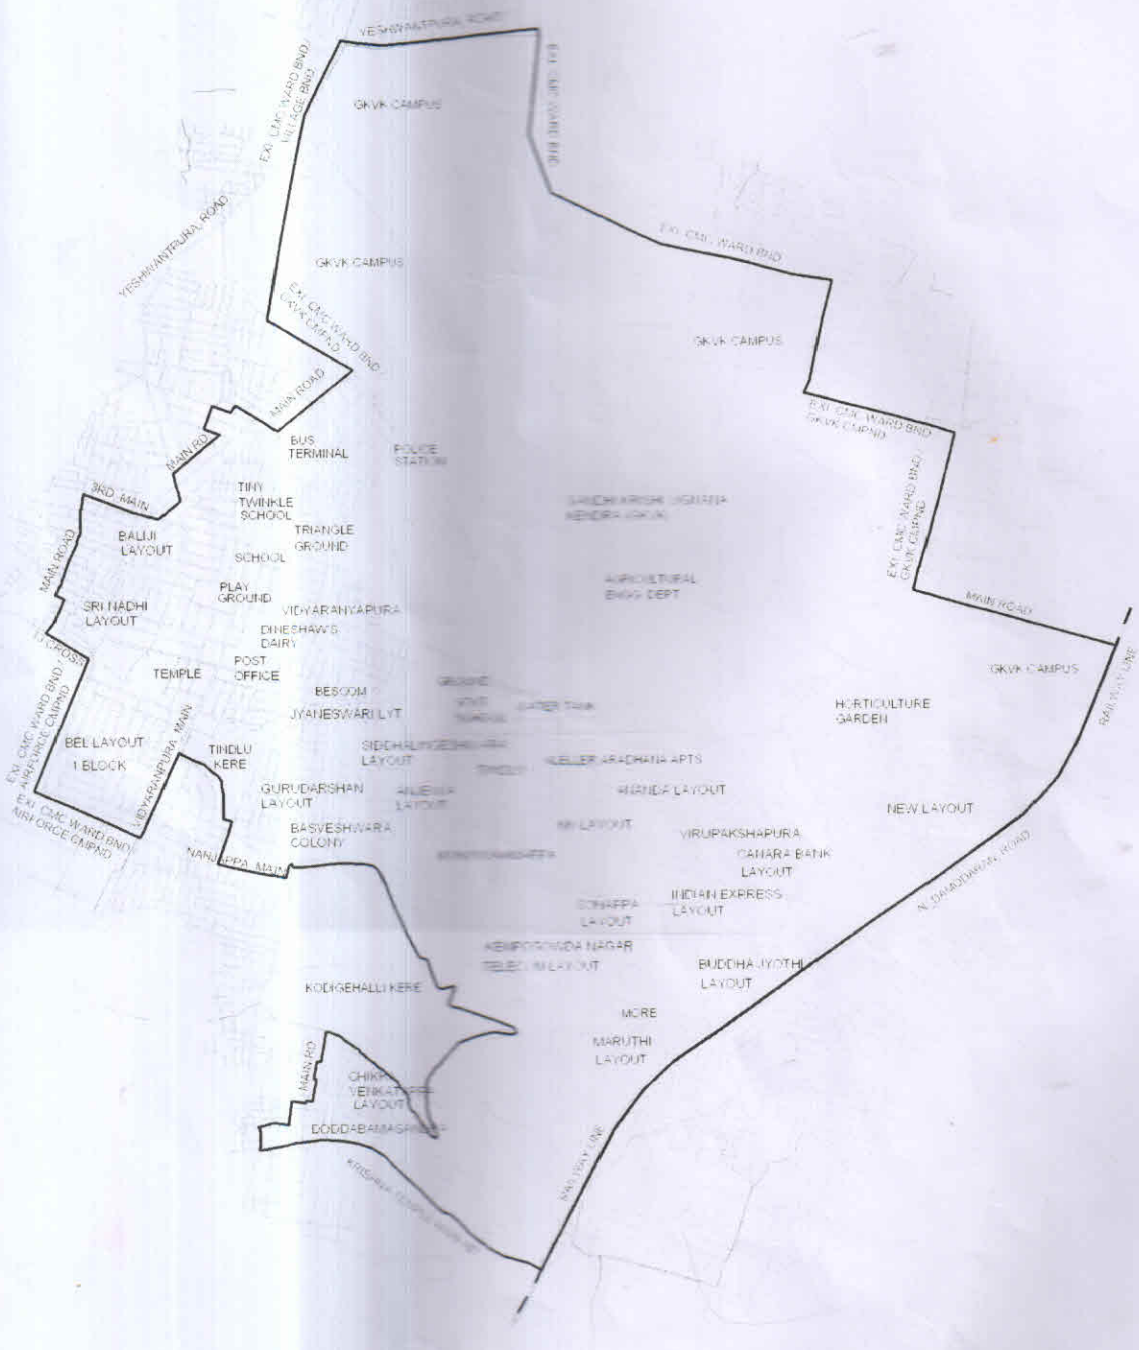

INDEX

PROPOSED WARD BOUNDARY

RIVER/ DRAIN

RAILWAY LINE

ROAD

A4-4-09

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ವಿದ್ಯಾರಣ್ಯಪುರ ಉಪ ವಿಭಾಗ
ಯಲಹಂಕ ವಲಯ,
ಬೃ. ಬೆಂ. ಮ. ಪಾ., ಬೆಂಗಳೂರು-92